



EPSRC

# Introduction to OpenMP

---

## Lecture 3: Parallel Regions



# Parallel region directive

- Code within a parallel region is executed by all threads.
- Syntax:

Fortran: `!$OMP PARALLEL`  
*block*  
`!$OMP END PARALLEL`

C/C++: `#pragma omp parallel`  
{  
*block*  
}



# Parallel region directive (cont)

Example:

```
fred();  
#pragma omp parallel  
{  
    billy();  
}  
daisy();
```

fred

billy	billy	billy	billy
-------	-------	-------	-------

daisy



# Useful functions

- Often useful to find out number of threads being used.

Fortran:

```
USE OMP_LIB  
INTEGER FUNCTION OMP_GET_NUM_THREADS ()
```

C/C++:

```
#include <omp.h>  
int omp_get_num_threads(void);
```

- **Important note:** returns 1 if called outside parallel region!



# Useful functions (cont)

- Also useful to find out number of the executing thread.

Fortran:

```
USE OMP_LIB  
INTEGER FUNCTION OMP_GET_THREAD_NUM()
```

C/C++:

```
#include <omp.h>  
int omp_get_thread_num(void)
```

- Takes values between 0 and `OMP_GET_NUM_THREADS () - 1`



# Clauses

- Specify additional information in the parallel region directive through *clauses*:

Fortran : `!$OMP PARALLEL [clauses]`

C/C++: `#pragma omp parallel [clauses]`

- Clauses are comma or space separated in Fortran, space separated in C/C++.



# Shared and private variables

- Inside a parallel region, variables can be either **shared** (all threads see same copy) or **private** (each thread has its own copy).
- Shared, private and default clauses

Fortran: **SHARED** (*list*)

**PRIVATE** (*list*)

**DEFAULT** (SHARED|PRIVATE|NONE)

C/C++: **shared** (*list*)

**private** (*list*)


**default** (shared|none)



# Shared and private (cont)

Example: each thread initialises its own column of a shared array:

```
!$OMP PARALLEL DEFAULT(NONE), PRIVATE(I,MYID),  
!$OMP& SHARED(A,N)  
    myid = omp_get_thread_num() + 1  
    do i = 1,n  
        a(i,myid) = 1.0  
    end do  
!$OMP END PARALLEL
```

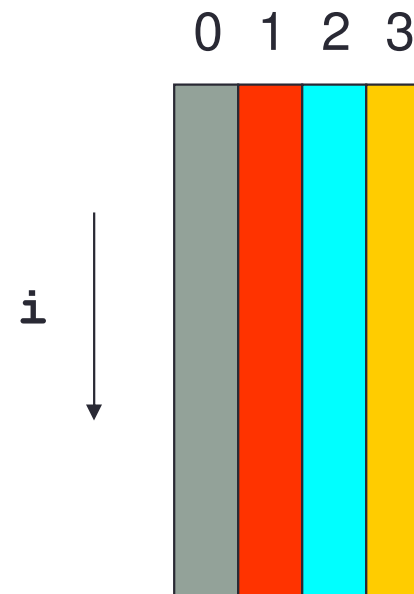



# Multi-line directives

- Fortran: fixed source form

```
!$OMP PARALLEL DEFAULT (NONE) , PRIVATE (I, MYID) ,  
!$OMP & SHARED (A, N)
```

- Fortran: free source form

```
!$OMP PARALLEL DEFAULT (NONE) , PRIVATE (I, MYID) , &  
!$OMP SHARED (A, N)
```

- C/C++:

```
#pragma omp parallel default(none) \  
private(i,myid) shared(a,n)
```



# Initialising private variables

- Private variables are uninitialised at the start of the parallel region.
- If we wish to initialise them, we use the `FIRSTPRIVATE` clause:

Fortran: `FIRSTPRIVATE (list)`

C/C++: `firstprivate (list)`



# Initialising private variables (cont)

Example:

```
    b = 23.0;
    . . . . .
#pragma omp parallel firstprivate(b), private(i,myid)
{
    myid = omp_get_thread_num();
    for (i=0; i<n; i++){
        b += c[myid][i];
    }
    c[myid][n] = b;
}
```



# Reductions

- A *reduction* produces a single value from associative operations such as addition, multiplication, max, min, and, or.
- Would like each thread to reduce into a private copy, then reduce all these to give final result.
- Use REDUCTION clause:

Fortran: **REDUCTION** (*op: list*)

C/C++: **reduction** (*op: list*)

- Can have reduction arrays in Fortran, but not in C/C++



# Reductions (cont.)

Example:

```
b = 10
!$OMP PARALLEL REDUCTION(+:b),
!$OMP& PRIVATE(I,MYID)
  myid = omp_get_thread_num() + 1
  do i = 1,n
    b = b + c(i,myid)
  end do
!$OMP END PARALLEL
a = b
```

Value in original variable is saved

Each thread gets a private copy of **b**, initialised to 0

All accesses inside the parallel region are to the private copies

At the end of the parallel region, all the private copies are added into the original variable



# Exercise

## Area of the Mandelbrot set

- Aim: introduction to using parallel regions.
- Estimate the area of the Mandelbrot set by Monte Carlo sampling.
  - Generate a grid of complex numbers in a box surrounding the set
  - Test each number to see if it is in the set or not.
  - Ratio of points inside to total number of points gives an estimate of the area.
  - Testing of points is independent - parallelise with a parallel region!

